

DATASHEET

HALF MASK

PROTECTION AGAINST GAS, VAPOUR & DUST



SERIES 7000

Size S



7001
7004 Silicone

Size M




7002
7005 Silicone

Size L




7003
7006 Silicone

CHARACTERISTICS



Extremely Lightweight



Easy to clean. Easy maintenance.
Easily accessible components. Clear design and surfaces.






EasyLock® filter system
No additional parts needed.



100% PVC-FREE
All Moldex products and packaging are 100% PVC-free.

EASYLOCK®



| Gas filters | | Particulate filters | | Pre-assembled filter combinations | |
|-------------|----------------|---------------------|-----------------------|-----------------------------------|----------------|
| Article | Type of filter | Article | Type of filter | Article | Type of filter |
| 9100 | A1 | 9010 | P1 R | 9120 | ATP2 R |
| 9200 | A2 | 9020 | P2 R | 9230 | A2P3 R |
| 9300 | ABE1 | 9030 | P3 R | 9430 | ABEK1P3 R |
| 9400 | ABEK1 | 9022 | P2 R + O ₃ | 9730 | ABEK1HgP3 R D |
| 9500 | A2B2E1 | 9032 | P3 R + O ₃ | | |
| 9600 | AX | | | | |
| 9800 | ABEK2* | | | | |

*EN 14387 weight limitation: ABEK2 + P2 or P3 restricted to full face mask.

CERTIFICATION

The Moldex Series 7000 meet the requirements of EN140:1998 and are CE-marked in accordance with the requirements of European Directive 89/686/EEC. The Institut für Arbeitsschutz IFA in St. Augustin (0121) in Germany is the body responsible for both type examination (article 10) and monitoring of production (article 11B). The products are manufactured in an ISO 9001 certified plant.

MATERIAL

Face piece 7001/7002/7003: Thermoplastic Elastomere (TPE)

Face piece 7004/7005/7006: Silicone rubber

Head Strap: Polypropylene (PP) + Lycra

Clip: Polypropylene (PP)

Inhalation valve: Natural rubber

Exhalation valve: Silicone rubber

WEIGHT

7001: 98 g **7002:** 98 g **7003:** 100 g
7004: 124 g **7005:** 126 g **7006:** 133 g

TESTING

The respirators of the Moldex 7000 Series have been tested to EN 140:1998 and fulfil all requirements of the relevant categories of the norm.

Inward leakage of face piece

Ten test subjects wearing respirators perform a variety of exercises on a treadmill. During the exercises the amount of aerosol that penetrates the filter, the face seal and the valve are sampled.

The inward leakage of the test contaminant must not exceed a value of 5% of the inhaled air with 46 out of 50 test exercises. 8 out of 10 average values must not exceed 2% of the total inward leakage.

Flammability

The face piece is passed through a 800°C (+/- 50°C) flame with a speed of 6 cm/s. After passing through the flame the face piece has to self-extinguish.

DATASHEET

HALF MASK


PROTECTION AGAINST GAS, VAPOUR & DUST




IMPORTANT INFORMATION FOR USERS

- This breathing apparatus does not supply oxygen (O₂)
- The product does not contain any metallic parts that could cause ignition in potentially explosive atmospheres.
- If you have any questions about how to use the product, please contact MOLDEX-METRIC.
- You must also observe the relevant rules and regulations when using respiratory equipment.
- Under certain circumstances, individuals with beards, long sideburns or other anomalies in the area around the sealing lines, may be unable to achieve a properly sealing fit.
- The masks must not be modified in anyway.
- Read the instruction manual before using the mask. Failure to comply with these instructions on how to use the product and failure to wear the respiratory protection in the polluted area may negatively impact on the health of the user and lead to permanent injury.
- **Caution: Do not use filter equipment in unventilated containers and confined spaces.**

SPARE PARTS



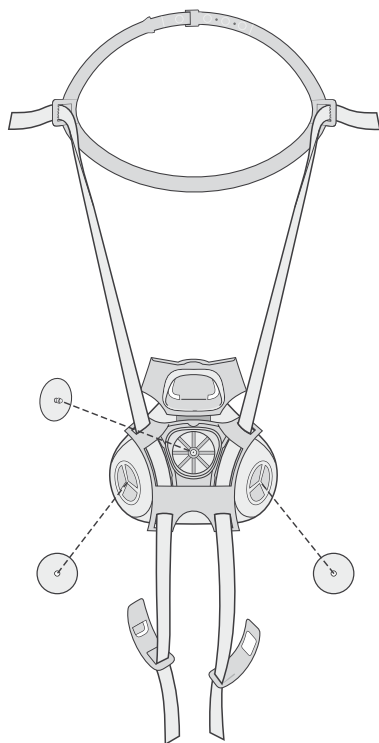


Part no. 797202



| Part no. | Description |
|----------|------------------------------|
| 797202 | Head Harness + Diaphragm kit |




INSTRUCTIONS FOR FITTING



CHECK OF FACESEAL



LOCK MODE / DROP DOWN MODE



INFO

For help on selection and training please contact us.
We offer a wide range of training packages and support material.

MOLDEX-METRIC AG & Co. KG
Unit 9, Glaisdale Point
Off Glaisdale Drive, Bilborough
Nottingham. NG8 4GP

Tel.: +44 (0)115 985 4288
Fax: +44 (0)115 985 4211
info@uk.moldex-europe.com
www.moldex-europe.com